


## STANDARD CONVEYOR CHAIN

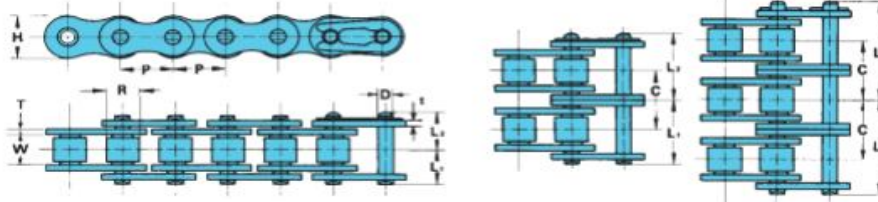

Tipe Rantai	ISO BS/DIN No.	Pitch  P	Dia. Roller  R	Jarak Antara Inner Plate  W	Pin			Link Plate			Average Breaking Loads kgf.
					D	L1	L2	T	t	H	
<b>SINGLE STRAND</b>											
F - 01009 S	06B	9.5	6.4	5.7	3.3	6.5	7.5	1.3	1.0	8.2	1,048
F - 02008 S	08B	12.7	8.5	7.7	4.4	8.4	10.0	1.5	1.5	11.8	2,000
F - 03015 S	10B	15.9	10.2	9.7	5.1	9.4	11.4	1.5	1.5	14.7	2,649
F - 03019 S	12B	19.1	12.1	11.7	5.7	11.0	13.2	1.8	1.8	16.1	3,402
F - 07025 S	16B	25.4	15.9	17.0	8.3	17.9	19.9	4.0	3.2	21.0	7,484
F - 11031 S	20B	31.8	19.1	19.6	10.2	20.1	23.2	4.5	3.5	26.0	11,022
F - 19038 S	24B	38.1	25.4	25.4	14.6	26.7	31.4	6.0	5.2	33.4	19,006
F - 21044 S	28B	44.5	27.9	31.0	15.9	32.5	37.4	7.5	6.3	36.4	21,999
F - 28050 S	32B	50.8	29.2	31.0	17.8	32.1	37.7	7.0	6.3	42.2	28,622
F - 40063 S	40B	63.5	39.4	38.1	22.9	39.2	45.1	8.5	8.0	52.9	40,007
<b>DOUBLE STRAND</b>											
F - 02009 S-2	06B-2	9.5	6.4	5.7	3.3	11.5	12.9	1.3	1.0	8.2	1,851
F - 03008 S-2	08B-2	12.7	8.5	7.7	4.4	15.3	17.0	1.5	1.5	11.8	3,447
F - 05015 S-2	10B-2	15.9	10.2	9.7	5.1	17.8	19.6	1.5	1.5	14.7	5,307
F - 07019 S-2	12B-2	19.1	12.1	11.7	5.7	20.8	22.9	1.8	1.8	16.1	6,804
F - 14025 S-2	16B-2	25.4	15.9	17.0	8.3	33.9	35.9	4.0	3.2	21.0	14,288
F - 20031 S-2	20B-2	31.8	19.1	19.6	10.2	38.3	41.4	4.5	3.5	26.0	20,911
F - 36038 S-2	24B-2	38.1	25.4	25.4	14.6	50.9	55.7	6.0	5.2	33.4	36,197
F - 41044 S-2	28B-2	44.5	27.9	31.0	15.9	62.2	67.2	7.5	6.3	36.4	41,912
F - 54050 S-2	32B-2	50.8	29.2	31.0	17.8	61.4	67.0	7.0	6.3	42.2	54,386
F - 77063 S-2	40B-2	63.5	39.4	38.1	22.9	75.4	81.2	8.5	8.0	52.9	76,793
<b>TRIPPLE STRAND</b>											
F - 05008 S-3	08B-3	12.7	8.5	7.7	4.4	22.3	24.0	1.5	1.5	11.8	4,944
F - 08015 S-3	10B-3	15.9	10.2	9.7	5.1	26.1	27.9	1.5	1.5	14.7	7,938
F - 10019 S-3	12B-3	19.1	12.1	11.7	5.7	30.6	32.6	1.8	1.8	16.1	10,206
F - 21025 S-3	16B-3	25.4	15.9	17.0	8.3	49.9	51.8	4.0	3.2	21.0	21,319
F - 31031 S-3	20B-3	31.8	19.1	19.6	10.2	56.5	59.7	4.5	3.5	26.0	31,389
F - 54038 S-3	24B-3	38.1	25.4	25.4	14.6	75.1	79.8	6.0	5.2	33.4	54,204
F - 63044 S-3	28B-3	44.5	27.9	31.0	15.9	92.0	97.0	7.5	6.3	36.4	62,822
F - 82050 S-3	32B-3	50.8	29.2	31.0	17.8	90.7	96.2	7.0	6.3	42.2	81,692
F - 115063 S-3	40B-3	63.5	39.4	38.1	22.9	111.6	117.4	8.5	8.0	52.9	115,802

*all dimension in mm.*